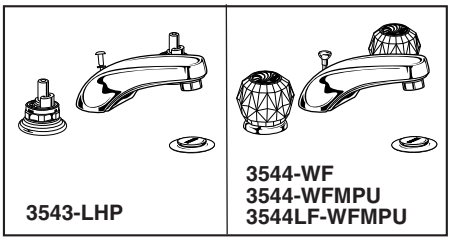

Submitted Model No.: _____

Specific Features: _____

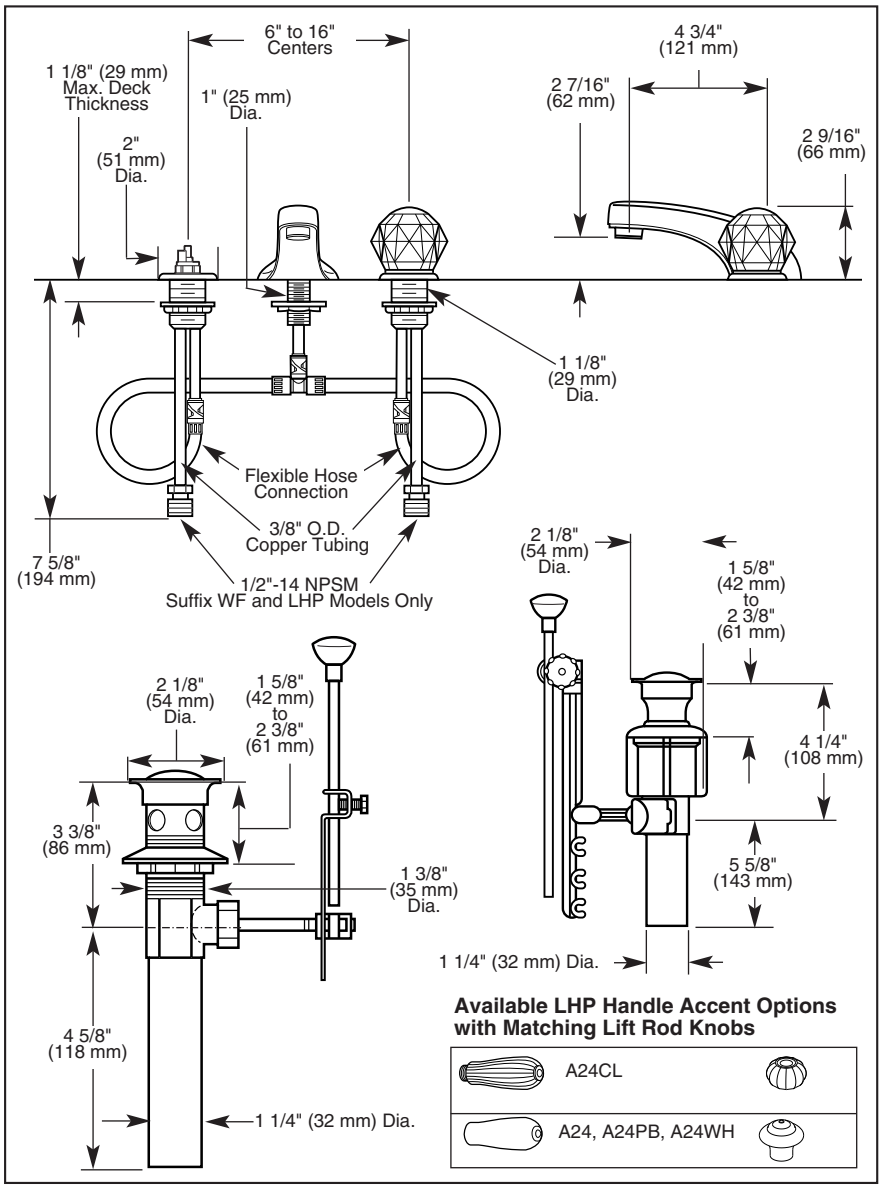
6" to 16" Centers
1 1/8" (29 mm) Max. Deck Thickness
1" (25 mm) Dia.
2" (51 mm) Dia.
4 3/4" (121 mm)
2 7/16" (62 mm)
2 9/16" (66 mm)
1 1/8" (29 mm) Dia.
Flexible Hose Connection
3/8" O.D. Copper Tubing
7 5/8" (194 mm)
1/2"-14 NPSM Suffix WF and LHP Models Only
2 1/8" (54 mm) Dia.
1 5/8" (42 mm) to 2 3/8" (61 mm)
3 3/8" (86 mm)
1 3/8" (35 mm) Dia.
4 5/8" (118 mm)
1 1/4" (32 mm) Dia.
4 1/4" (108 mm)
5 5/8" (143 mm)
Available LHP Handle Accent Options with Matching Lift Rod Knobs
A24CL
A24, A24PB, A24WH

Available LHP Handle Options **▲ Designate proper finish suffix**

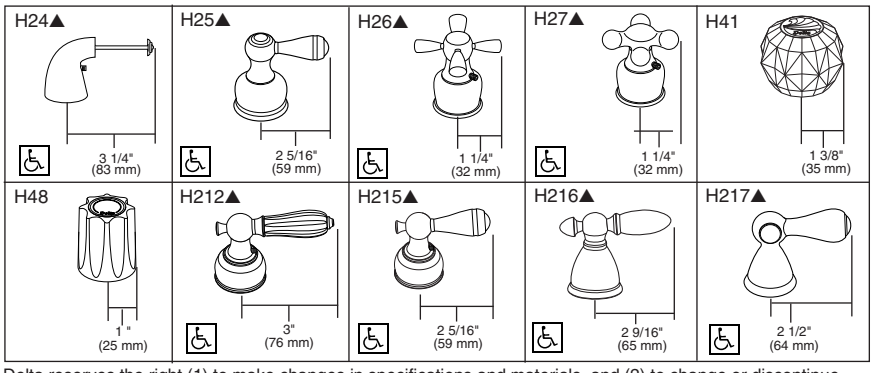

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.

DSP-L-3543 Rev. E

LAVATORY FAUCETS

- Classic Series
- Two Handle Deck Mount
- 3 Hole Sink Applications
- 6" to 16" Centers
- Quick-Snap® Installation

STANDARD SPECIFICATIONS:

- Solid brass fabricated end valve and spout bodies.
- Widespread - 6" (152mm) to 16" (406 mm) centers.
- 4 3/4" (121 mm) long rigid spout.
- Quick-Snap® installation.
- LHP - Less Handle Program. See handle options below.
- 1/4 turn handle stops.
- Hot and cold stems are interchangeable.
- Control mechanism is the rotating cylinder type with stainless steel plate and 180° rotation, with replaceable non-metallic seats operating in stainless steel lined sockets.
- 3/8" O.D. copper supply tubes.
- Models with suffix "WF" and "LHP" supplied with 1/2"-14 NPSM adapters.
- Models 3544 series with Snap-N-Pop-Up® drain have polypropylene pop-up type fitting with plated flange and stopper.
- Models 3543 series and models with suffix "MPU' have metal drain with pop-up type fitting with plated flange and stopper.
- Maximum flow rate 1.5 gpm @ 60 PSI.

WARRANTY

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASME A112.18.2 / CSA B125.2
- Indicates compliance to ICC/ANSI A117.1
- "LF" suffix indicates model is verified to <0.25% Pb average wetted surface regulation

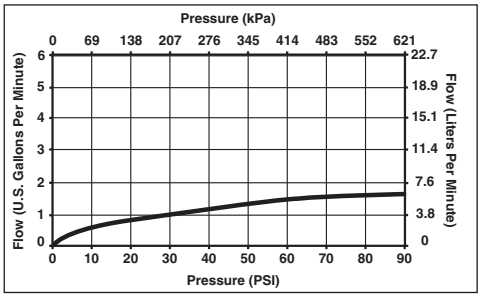

DELTA FAUCET COMPANY

55 E. 111th Street, Indianapolis, Indiana 46280
395 Matheson Blvd, E., Mississauga, ON L4Z 2H2

© 2009 Masco Corporation of Indiana

1.D.23